

- 1 Unplug the receiver cable from under the cab. Plug-in in T-cable to the male connector on cab and female end to receiver.



- 2 Run the long end of the cable to the roof and plug into the modem in port A.




Note: Placement of the elevatemodem on the cab roof is vitally important to performance. User must extend the entire length of the cable away from the receiver as shown below.




- 3 Use the included alcohol swabs to clean the mounting area. Peel back the sticker tabs and press the mounting plate firm on the cleaned cab roof.




- 4 Place elevatemodem on the installed mounting plate with the magnets facing down.

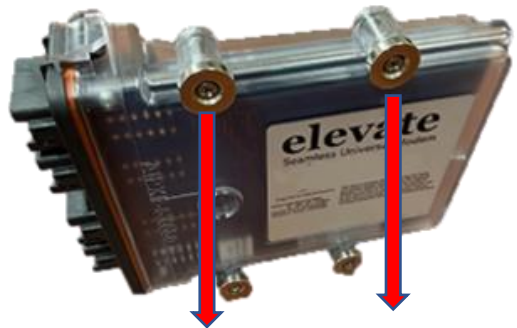


6 Go to the Starfire Main settings page & select the GPS Receiver icon in the Top right corner (F).

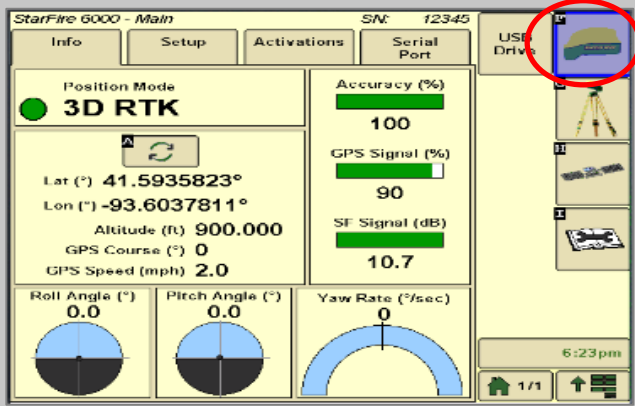


7 Go to the serial port page & confirm: Baud Rate is 38400, Output rate at 1Hz & GGA box check marked.

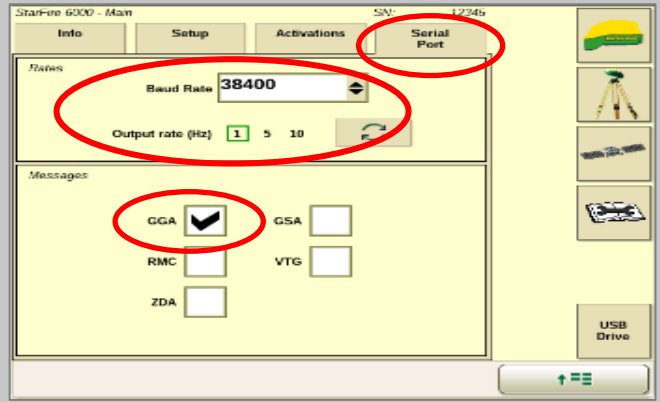

8 Continue to the RTK setup page (G).

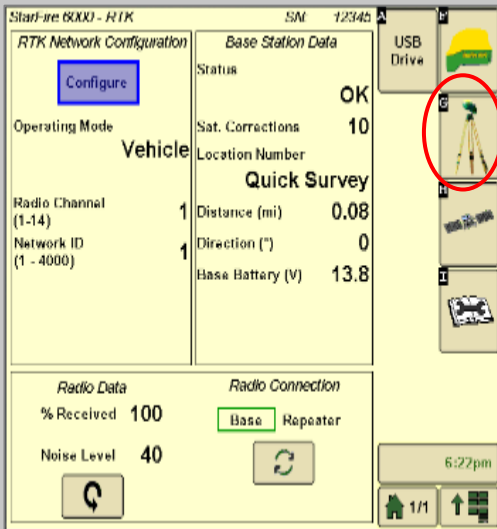

9 Set the Radio Channel & Network ID both to 1.

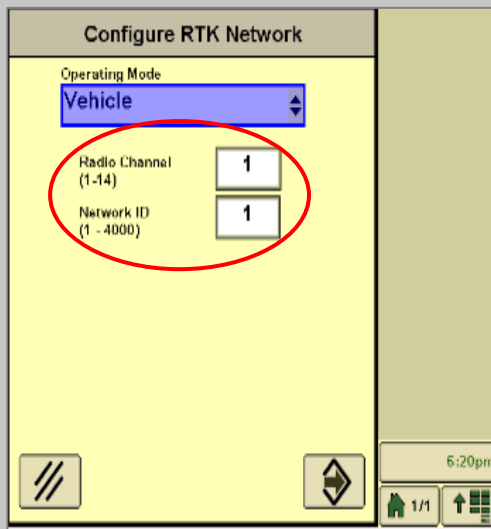

10 Confirm RTK fix.

