


- 1 Install the elevate cable into either Port C or D




- 2 **Note:** Placement of the elevate modem on the cab roof is vitally important to performance. User must extend the entire length of the cable away from the receiver as shown below.



- 3 Select the Wrench icon > GPS Receiver > Setup

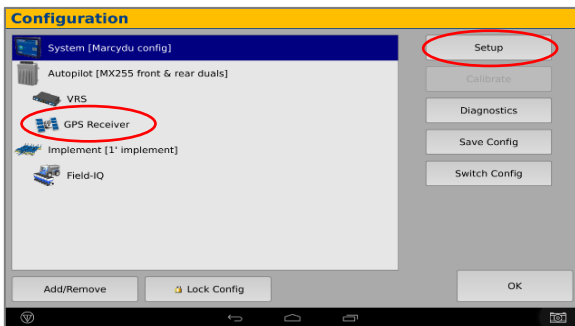


- 4 On the GPS setup page change the Corrections to CenterPoint RTK

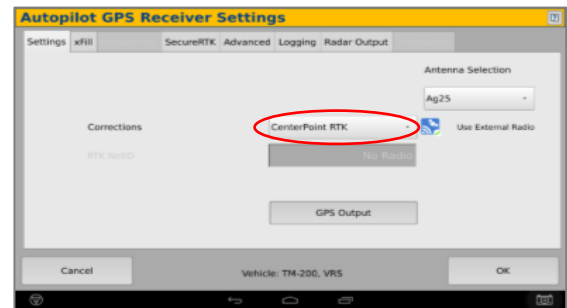


- 5 Select the xFill tab and confirm settings according to the below screenshot



- 6 Return to the Configuration page & select GPS receiver and Diagnostics (password 2009)

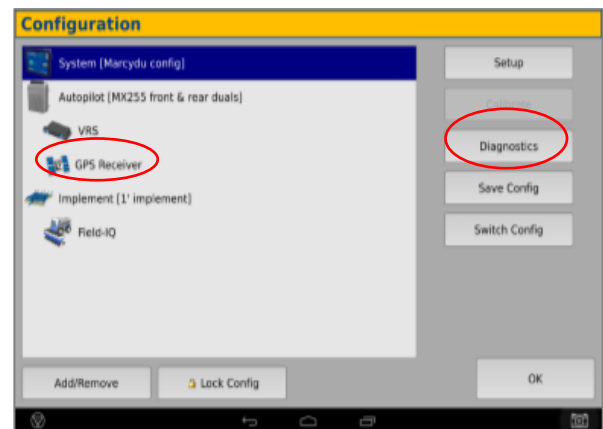

7 Select Ag Remote

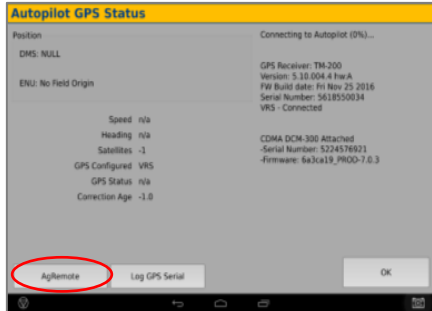

8 Ag Remote setup:

Right arrow twice to Configuration> Down arrow to Configuration menu> Right arrow to Port D config> Down arrow to Enter

Right arrow once to select TSIP & Up arrow to change TSIP to RTCM

*Confirm Baud rate is set to 38k4> Right arrow 5x to the Bottom TSIP & Up arrow to change to NONE

Press Enter (confirm settings according to screenshot)> Es icon 3x to return to the main screen

