

## AGCO NT03 Display Setup

For:

2018 MF8700

2018 CH MT 600E with DataTronic 5

2018 MF8700 with DataTronic 5

2019 MF8700S

2019 MF6700S



2019 MF7700S

1 Install the Beacon & AGCO adapter. This connection is located on top of the roof in the compartment below the GPS receiver.


2 On-screen configuration:  
From the Home screen, swipe right or left to the Map page; then tap on the map to view the side menu;

then select the Auto icon;

then select the Corrections icon in the Bottom Left

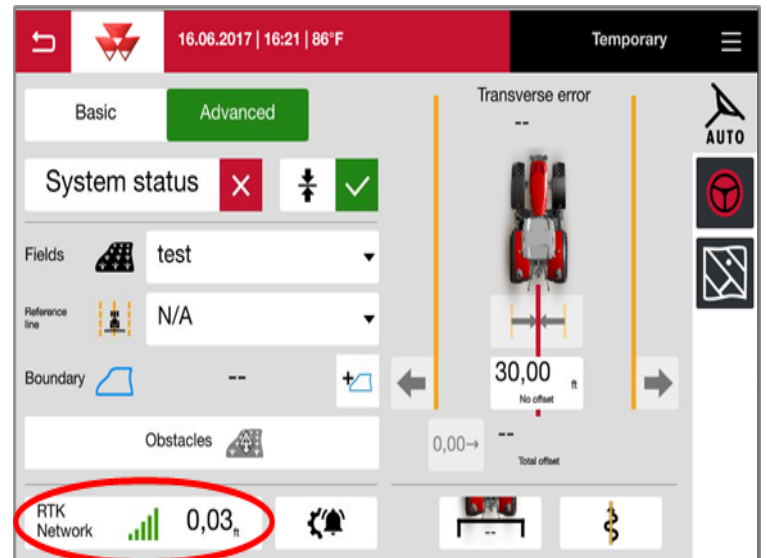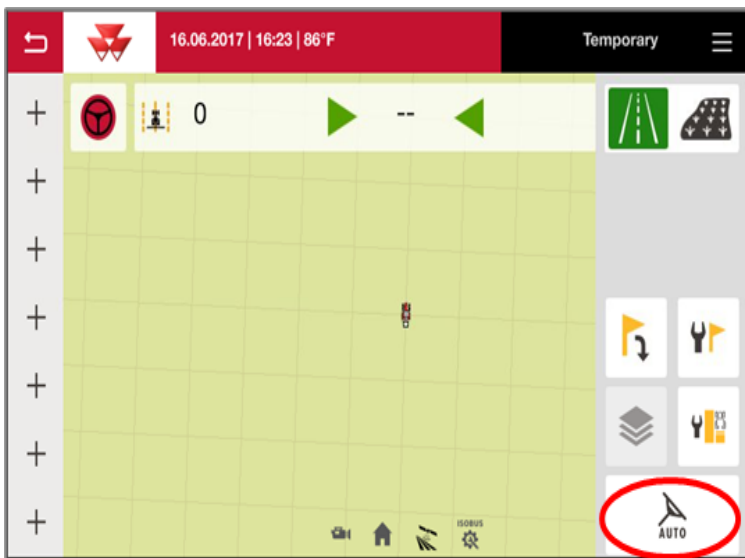

- 3 Set the Signal Type to “RTK network”; Modem Type to “External modem”; Transmission speed to match Beacon Baud Rate (38400); Parity to “none”; & Signal format to “RTCM 3.1”

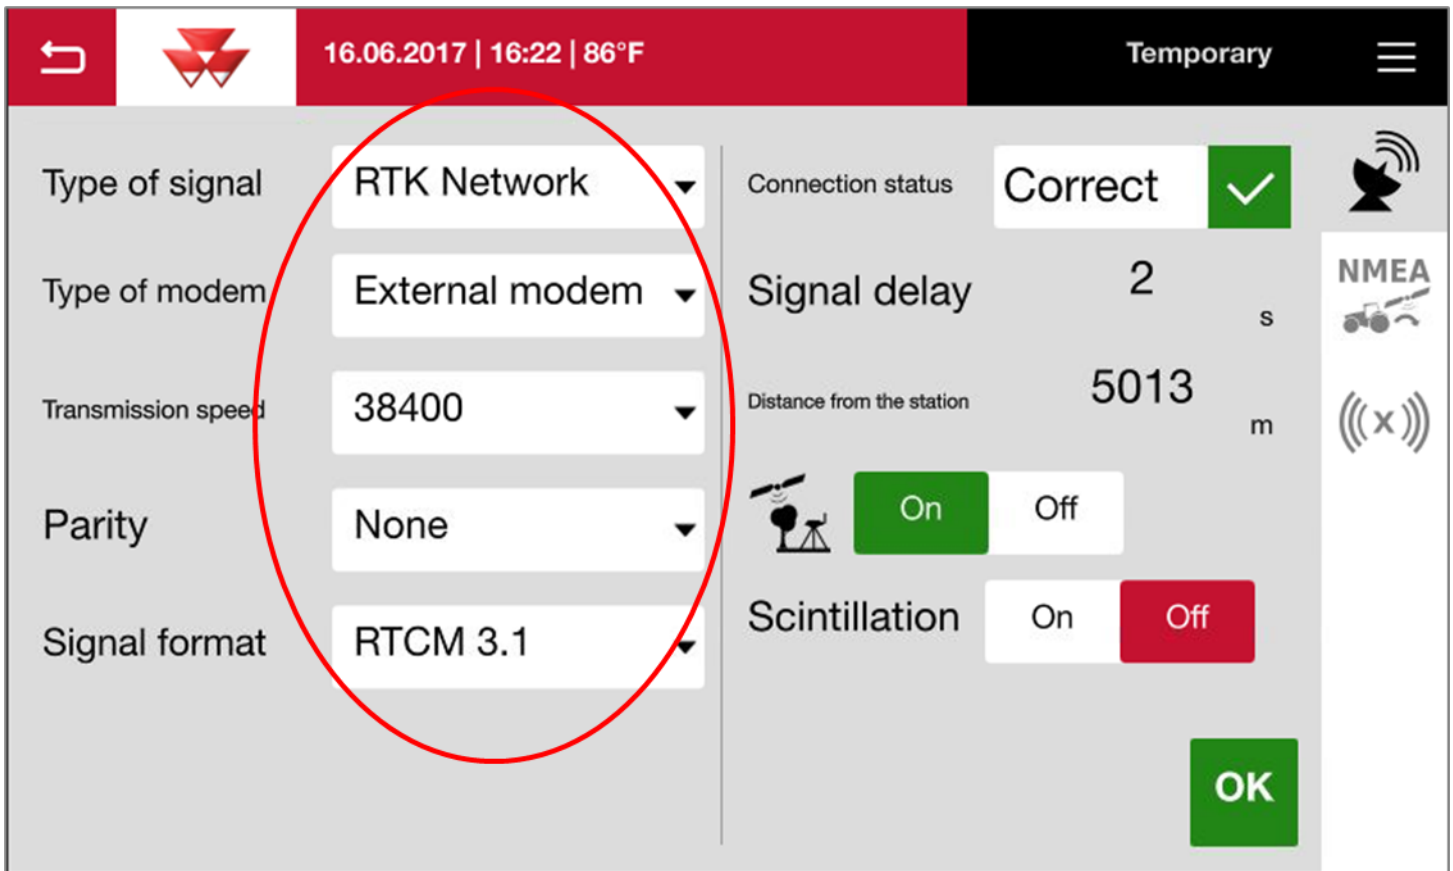

16.06.2017 | 16:22 | 86°F Temporary

Type of signal	RTK Network	Connection status	Correct	<input checked="" type="checkbox"/>
Type of modem	External modem	Signal delay	2	s
Transmission speed	38400	Distance from the station	5013	m
Parity	None	<input checked="" type="checkbox"/> On <input type="checkbox"/> Off		
Signal format	RTCM 3.1	Scintillation	<input type="checkbox"/> On <input checked="" type="checkbox"/> Off	

OK