




- 1 Connect the RV50 and the adapter to the Port B connection on the Ag Leader 6500/7500 cabling

Note: The null modem cable is not needed for Beacons





- 2 Connect the Power Tee to the Can B power/terminator connection on the Display cable

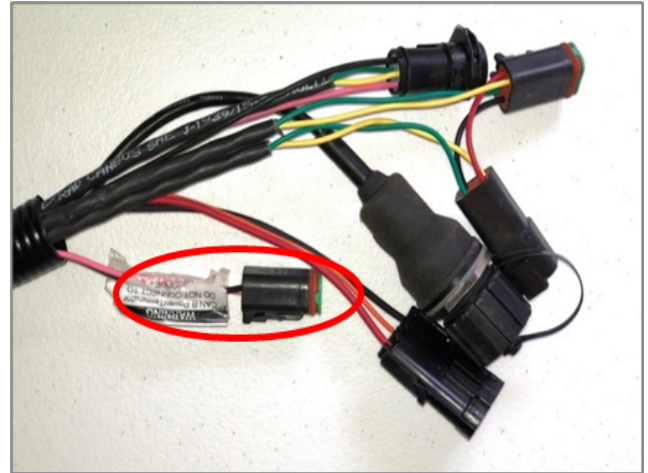

- 3 Tap the Setup wrench icon, then the



icon

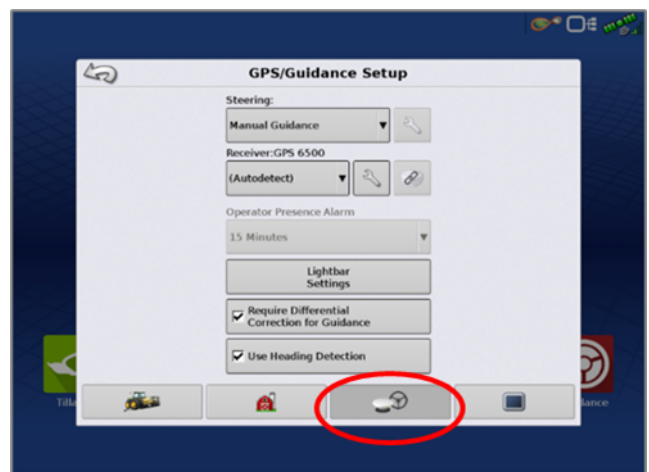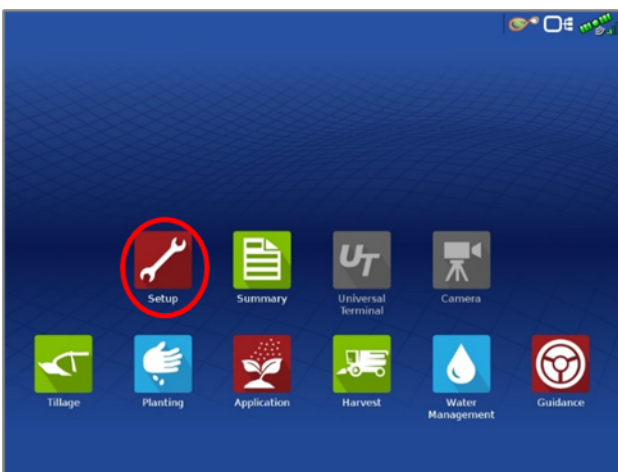



4 From the GPS/Guidance setup screen, select the wrench icon next to “Autodetect”



5 Ensure the Differential source is set to “RTK external”

