

If your receiver has the radio attached, remove radio before cable installation. If no radio is present, move to step #4.

Radio Removal

1 Use a Philips screw driver, take out the 2 screws holding the radio in place.



2 Pull the radio away from the receiver. Unplug the radio cable.



3 Place the orange dust cap onto the male end of the plug and push cable into receiver.



4 Use the 3 screws included in your Beacon 4.0 kit and attach to bracket. Screw bracket on receiver with the 2 screws removed from radio un-installation.



5 Plug in the small black male connector into the bottom of the Beacon 4.0



6 Place the receiver onto the roof bracket. Unplug the receiver from the roof connection, plug in the male end of the T-cable to the roof and the female end into the receiver cable.




John Deere "T" Cable Installation

Finished
Installation



7

Pair your Beacon 4.0 with the GR Tech NBV1 NTRIP Client iOS App. Once paired your iPad will ask to download directly from the Apple App Store. See our App QRC for set-up details.

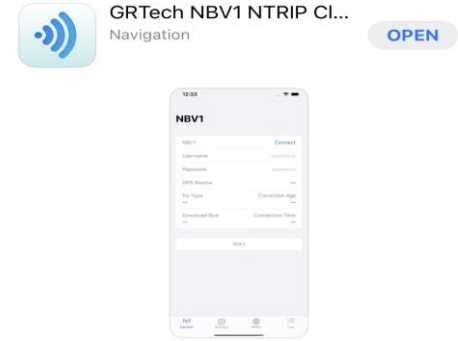


iOS App

John Deere Receiver Set-up


8

Go to the Starfire Main settings page & select the GPS Receiver icon in the Top right corner (F).

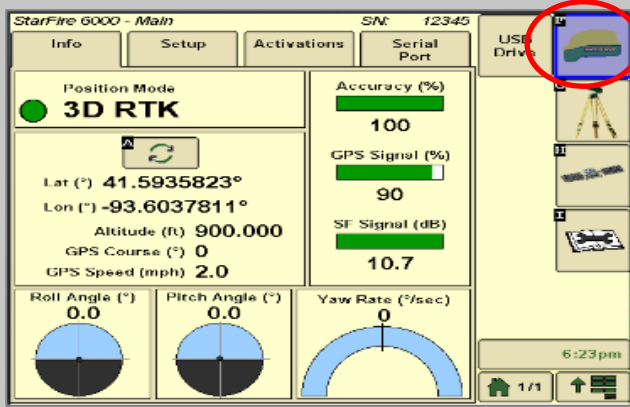


9

Go to the serial port page & confirm: Baud Rate is 38400, Output rate at 1Hz & GGA box check marked.

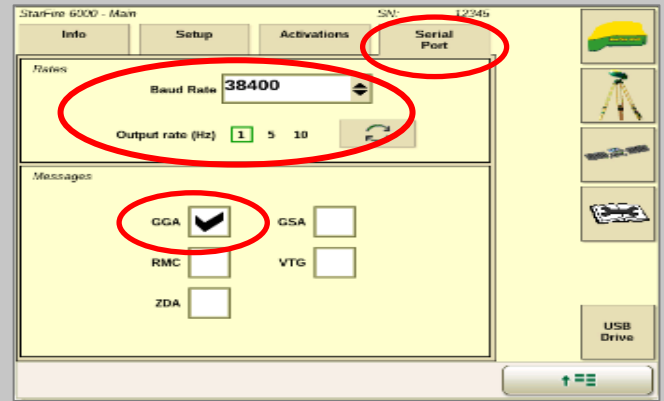


10

Continue to the RTK setup page (G).

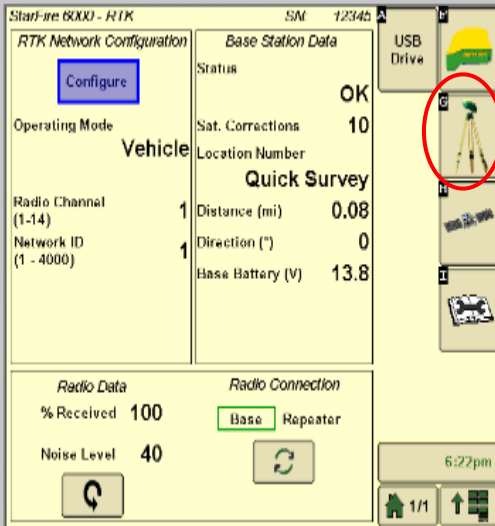

11

Set the Radio Channel & Network ID both to 1.

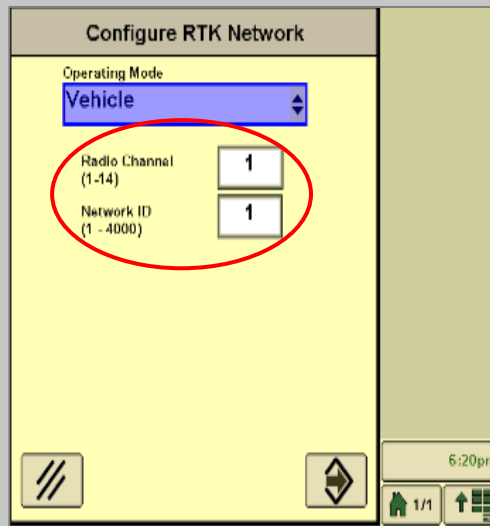

12

Confirm RTK fix.

