


Cable Installation

- 1 Connect the Beacon and the adapter to the Port B connection on the Ag Leader 6500/7500 cabling

Note: The null modem cable is not needed for Beacons



- 2 Connect the Power Tee to the Can B power/terminator connection on the Display cable

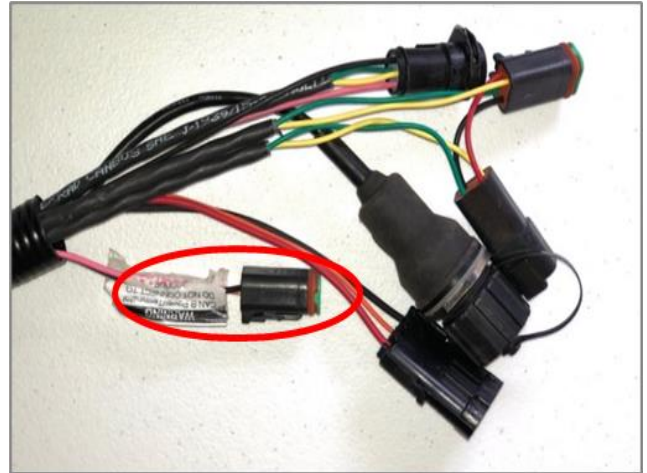


Mounting


Mounting bracket is supplied with your Beacon 4.0. For in-cab installation the mounting bracket is not required for proper installation.




iOS App

- 3 Pair your Beacon 4.0 with the GR Tech NBV1 NTRIP Client iOS App. Once paired your iPad will ask to download directly from the Apple App Store. See our App QRC for set-up details.

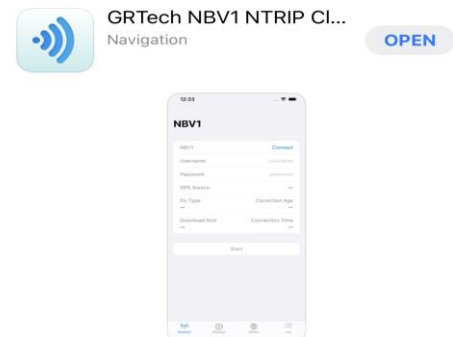

4 Tap the Setup wrench icon, then the  icon

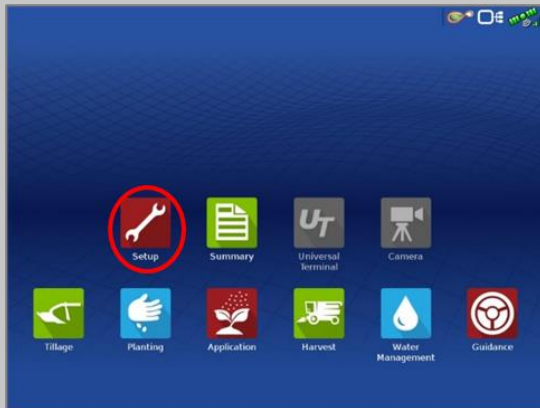

5 From the GPS/Guidance setup screen, select the wrench icon next to "Autodetect"



6 Ensure the Differential source is set to "RTK external"

