

### AGCO NT03 Display Setup

For:

2018 MF8700

2018 CH MT 600E with DataTronic 5

2018 MF8700 with DataTronic 5

2019 MF8700S

2019 MF6700S

2019 MF7700S

1

Install the Beacon & AGCO adapter. This connection is located on top of the roof in the compartment below the GPS receiver.

2

1. Use 3 screws supplied with kit and attach Beacon 4 to tapered part of bracket. Don't overtighten.
2. Use supplied alcohol swabs to clean a small section of the tractor roof.
3. Peel back the mounting plate adhesive strips and press onto roof.
4. The bracket will then magnetically mount to base plate.



**Note: Beacon 4 must be mounted vertical if outside.**

3

Pair your Beacon 4.0 with the GR Tech NBV1 NTRIP Client iOS App. Once paired your iPad will ask to download directly from the Apple App Store. See our App QRC for set-up details.



GRTech NBV1 NTRIP Cl...  
Navigation

OPEN



Continue installation on back page




2

On-screen configuration:

From the Home screen, swipe right or left to the Map page; then tap on the map to view the side menu;

then select the Auto icon;

then select the Corrections icon in the Bottom Left

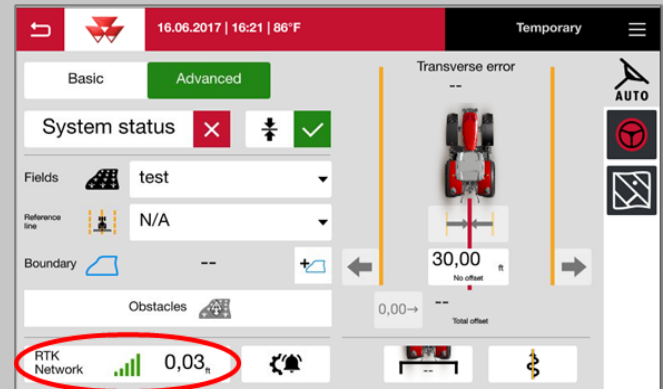

3

Set the Signal Type to “RTK network”; Modem Type to “External modem”; Transmission speed to match Beacon Baud Rate (38400); Parity to “none”; & Signal format to “RTCM 3.1”

